


Bandsaw Life

6 STEP BANDSAW SET-UP


1 Adjust the blade so that the deepest part of the gullet is in the center of the wheel.




4 Adjust the thrust bearings to be within 1/64" of the back edge of the blade, for both the top and the bottom bearings.
(Blade guard removed for clarity)

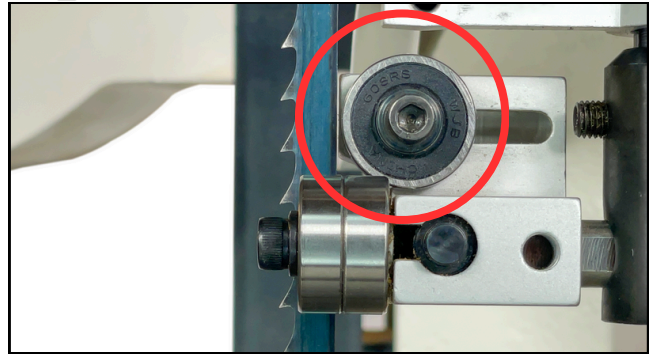


2 Back away all the blade guides and set the tension. Check by pressing the blade on the left side of the saw, target no more than 1/4" deflection.

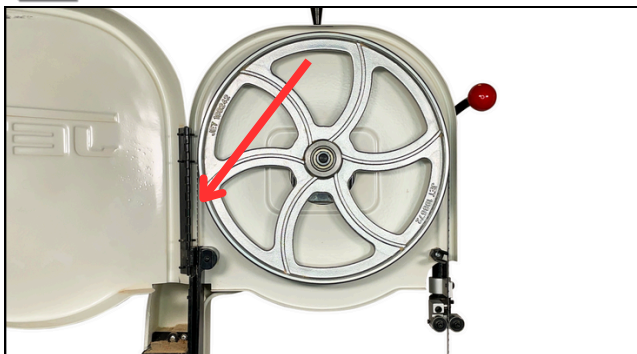


5 Adjust the side blade guides to be within 1/64" of the blade, for both the top and bottom guides.

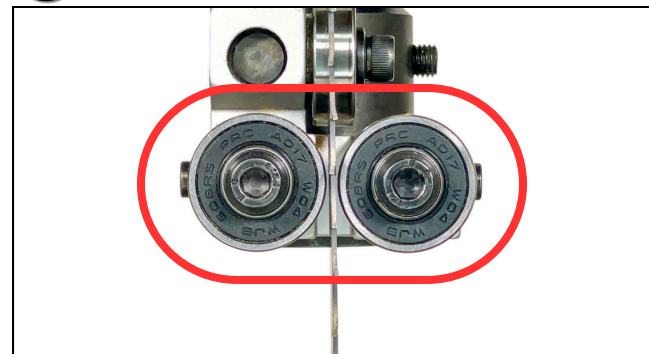

3 Align the front edge of the side blade guides about 1/16" behind the deepest part of the gullet, for both the top and the bottom guides.
(Blade guard removed for clarity)

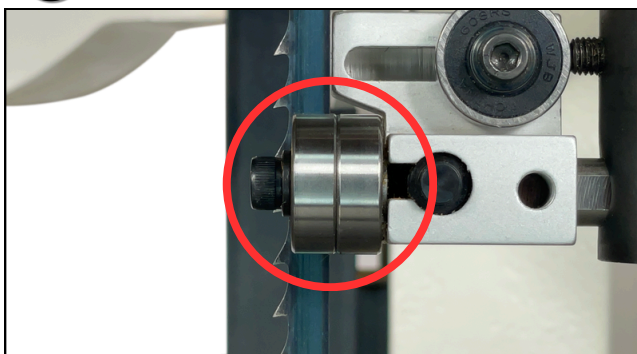

6 Level the table and square the fence to the blade using a precision square.
(Use the Alex Snodgrass Method)

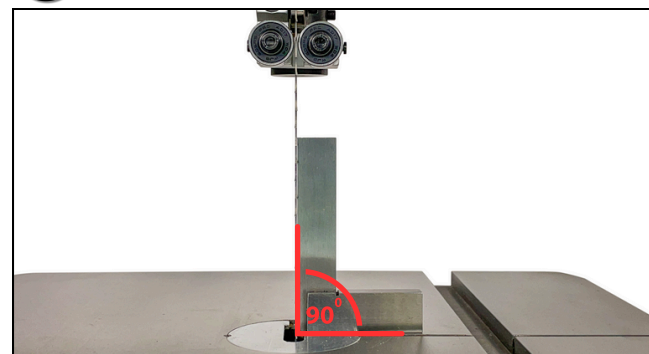

Blade Size: _____
Blade Width: _____
TPI: _____

Notes: _____

**VIEW
DEMO**

